

GR-REC4

Standard Quad-Receptacle Convenience Outlet



Panel or DIN Rail mounted AC outlets for powering laptop computers and test equipment.




SPECIFICATIONS

Voltage Rating	125V
Current Rating/Duplex	15A
Total Current Rating ¹	15A
Outlet Type	2X Standard Duplex Receptacle; Black, NEMA 5-15R
Mounting	Panel or 35mm DIN Rail
Wire Size Capacity	14 - 12 AWG
Wire Strip Length	0.20 - 0.31 in (5 - 8 mm)
Wire Type	Copper or Copper Clad
Tightening Torque	4.5 lb-in (0.51 N.m)
UL Temperature Rating ²	32 - 104 °F (0 - 40 °C)
Operating Temperature ³	32 - 140 °F (0 - 60 °C)
Circuit Protection	None
RoHS Compliant	No
UL Standard	UL508

MECHANICAL DRAWING

Dimension: GR-REC4 (in mm, 1mm = 0.0394 inch)

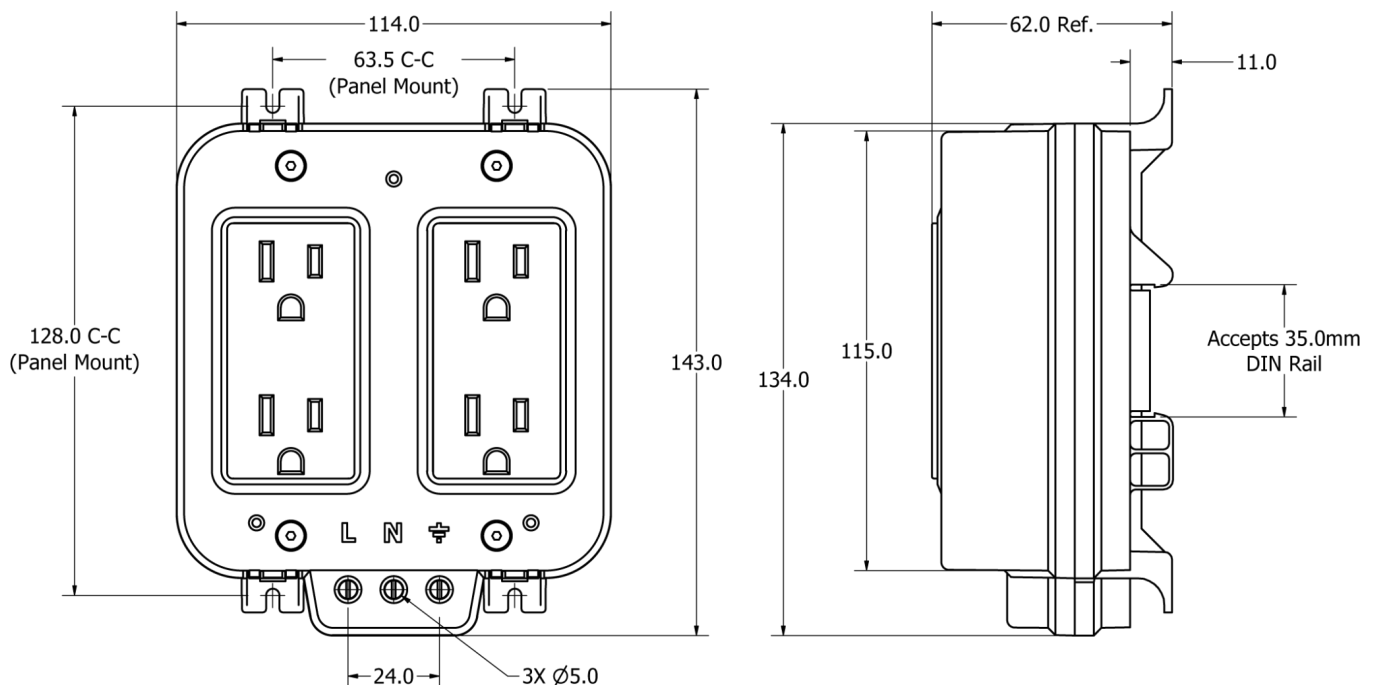

NOTES:

1. Combined current capacity of all outlets.
2. Maximum ambient temperature rating per UL508.
3. Maximum ambient temperature plus temperature rise of outlet wiring under load.