

Data Sheet




ICE Components, Inc.
Tel 678-560-9172 Fax 678-560-9304
cust.serv@icecomp.com

www.icecomponents.com
1165 Allgood Rd., Ste. #20, Marietta, GA 30062

General Information

Customer	
Part Number	IN06073-3
Revision	0
Description	Inductor
Date	AUG-07-2009
Reference	--
Doc Control #	--
Issue(For ICE use only)	--

Mechanical Drawing

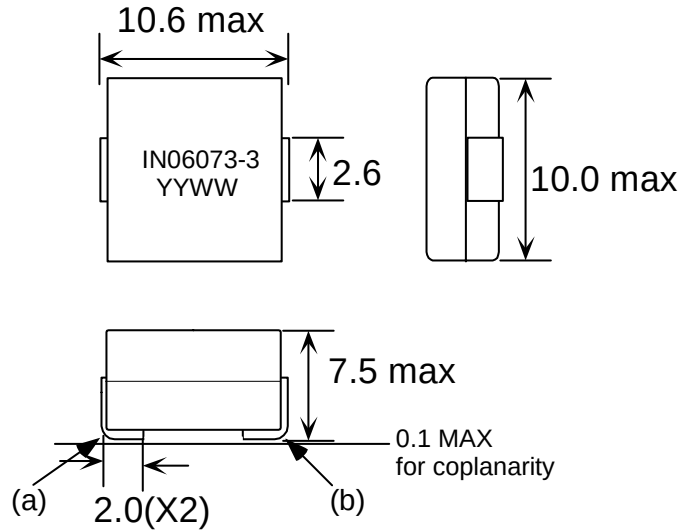


unit:mm

Specification


Item	Pins	Spec	Test Condition
Inductance @0Adc	S - F	210 nH +/- 15%	1 MHz, 0.1Vrms, series
Inductance @Isat at 25degC	S - F	150 nH min	1 MHz, 0.1Vrms, series (50 Adc)
DCR	S - F	0.22 mOhm +/- 10%	+25 deg C
Isat at 25degC	S - F	50 Adc max	
Isat at -40degC	S - F	53 Adc max	
Isat at 125degC	S - F	42 Adc max	
Idc	S - F	50 Adc max	

Sample Test Data

Schematic



Recommended PCB Layout



unit:mm

Remark

- Isat is the current at which the inductance drops by 15%.
- Idc is the current at which the temperature of the part increases by 40 deg C.
- Inductance vs. Current Curve and Temperature vs. Current Curve as attached.
- This is RoHS compliant product.
- The nominal DCR is measured from point (a) to point (b), as shown on the mechanical drawing.
- Operating temperature range: -40degC to +130degC.
- MSL: Level 1
- The part is subject to water cleaning.


Sample approval is required before release to production. Sample specifications take precedence over customer specifications.

Customer Signature

Rev.	Description	PRD	CHK	APP	Date	NTFY
0	Initial release	Emily	Gary	L. L. Chou	2009/8/7	2009/8/7

P/N: IN06073-3

Inductance vs. Current

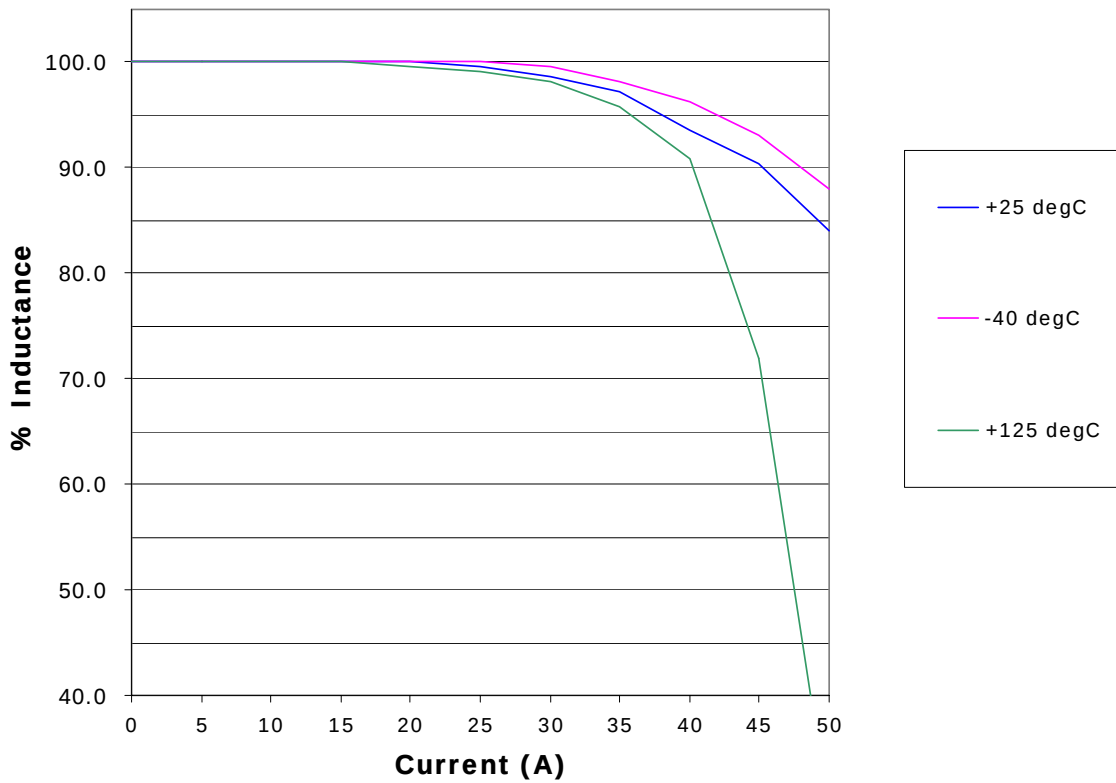

Temperature VS Current

