


GT06 Series

High-Isolation SMT Gate Drive Transformers

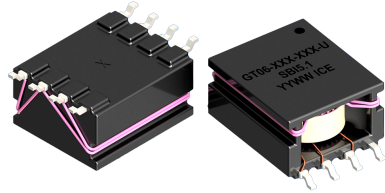

- ET products: Up to 142 V-μs
- Isolation voltage: 3,750 V_{AC}
- Creepage/Clearance: 12.5 mm
- Frequency range: 40 kHz to 350 kHz
- Models Meet AEC-Q200 qualification standards
- New models meet updated IEC standards (GT06-U)

CUSTOM
SOLUTIONS
AVAILABLE



REACH
COMPLIANT

RoHS
COMPLIANT

APPLICATIONS

- Isolated gate drivers
- Automotive systems
- Battery management systems
- Renewable energy systems
- Motor drivers and inverters
- Feedback & signal isolation

ELECTRICAL SPECIFICATIONS @ 25°C

Part Number	Turns Ratio (TR)	Drive Inductance ¹ (μH, Min)	DCR (Drive : Gate1 : Gate2) (Ω, Max)	Leakage Ind (Drive) ¹ (μH, Max)	ET Product ² (V-μs, Max)	SRF ³ (1-6) (MHz, Typ)	Cww1 / Cww2 ⁴ (pF, Typ)
GT06-111-049	1 : 1 : 1	882	0.720 : 0.720 : 0.720	0.36	49	2.24	11.77 / 12.10
GT06-111-100	1 : 1 : 1	2000	1.430 : 1.300 : 1.300	0.47	100	1.32	16.84 / 16.73
GT06-122-053	1 : 2.5 : 2.5	162	0.360 : 0.720 : 0.720	0.24	53	4.20	5.15 / 5.19
GT06-111-037-U	1 : 1 : 1	420	0.810 : 0.330 : 0.330	0.90	37	4.08	7.7 / 7.7
GT06-111-049-U	1 : 1 : 1	700	1.080 : 0.440 : 0.440	0.90	49	3.04	12.8 / 12.6
GT06-111-069-U	1 : 1 : 1	1450	1.540 : 0.610 : 0.610	1.60	69	2.16	15.1 / 15.0
GT06-1X1-039-U	1 : 1.1 : 1.1	380	0.780 : 0.340 : 0.340	0.60	39	4.08	8.1 / 8.1
GT06-1X1-051-U	1 : 1.1 : 1.1	650	1.020 : 0.470 : 0.470	0.90	51	3.32	9.8 / 10.1
GT06-1X1-069-U	1 : 1.1 : 1.1	1150	1.400 : 0.600 : 0.600	2.40	69	2.00	13.3 / 13.3
GT06-122-044-U	1 : 2.5 : 2.5	95	0.490 : 0.400 : 0.400	0.40	44	3.86	4.9 / 5.0
GT06-122-053-U	1 : 2.5 : 2.5	140	0.550 : 0.460 : 0.460	0.70	53	3.30	5.7 / 5.8
GT06-122-071-U	1 : 2.5 : 2.5	245	0.700 : 0.640 : 0.640	0.90	71	2.22	8.2 / 8.2
Part Number (Center-Tapped)			(Drive : Gate) (Ω, Max)			(2-4) (MHz, Typ)	Cww (pF, Typ)
GT06-110-039-U	1 : 1	470	0.940 : 0.370	1.20	39	3.91	5.9
GT06-110-053-U	1 : 1	850	1.230 : 0.490	1.20	53	2.54	9.4
GT06-110-071-U	1 : 1	1550	1.570 : 0.630	2.10	71	1.58	14.7
GT06-1X0-039-U	1 : 1.1	390	0.880 : 0.360	1.30	39	4.01	5.3
GT06-1X0-078-U	1 : 1.1	1550	1.580 : 0.690	2.10	78	1.38	15.3
GT06-120-106-U	1 : 2.5	550	0.980 : 1.020	1.20	106	0.99	10.9
GT06-120-142-U	1 : 2.5	1000	1.360 : 1.250	1.50	142	0.56	15.2

GENERAL DATA

Operating Temperature ⁵	-40°C to +130°C	Isolation Voltage (Drive-Gates) ⁷ - (All Models)	3750 V _{AC}
Storage Temperature ⁶	-20°C to +60°C	Isolation Voltage (Gate1-Gate2) - (GT06)	1500 V _{DC}
Frequency Range	40 kHz to 350 kHz	Isolation Voltage (Gate1-Gate2) ⁷ - (GT06-U)	1500 V _{AC}


Specifications subject to change without prior notice.

GT06 Series

High-Isolation SMT Gate Drive Transformers



- Drive and Leakage Inductances:** Tested at 100kHz, 0.1 V_{RMS}
- ET Product:** The maximum ET is based upon a flux density of 2500 Gauss for GT06-U (or 3300 Gauss for GT06) at 25°C.
 $ET = E_p / 2f$,
 where, E_p = Drive Voltage (V), f = Frequency (Hz)
- SRF** values are for reference only.
- Interwinding Capacitances:** Drive to Gate1/ Drive to Gate2
- Operating Temp. Range:** The combination of ambient temperature and temperature rise.
- Storage Temp.:** Applies to parts removed from original packaging.
- Hi-Pot Rating:** Tested @ 60Hz, 1mA.
- Suitable for **bipolar** applications only.

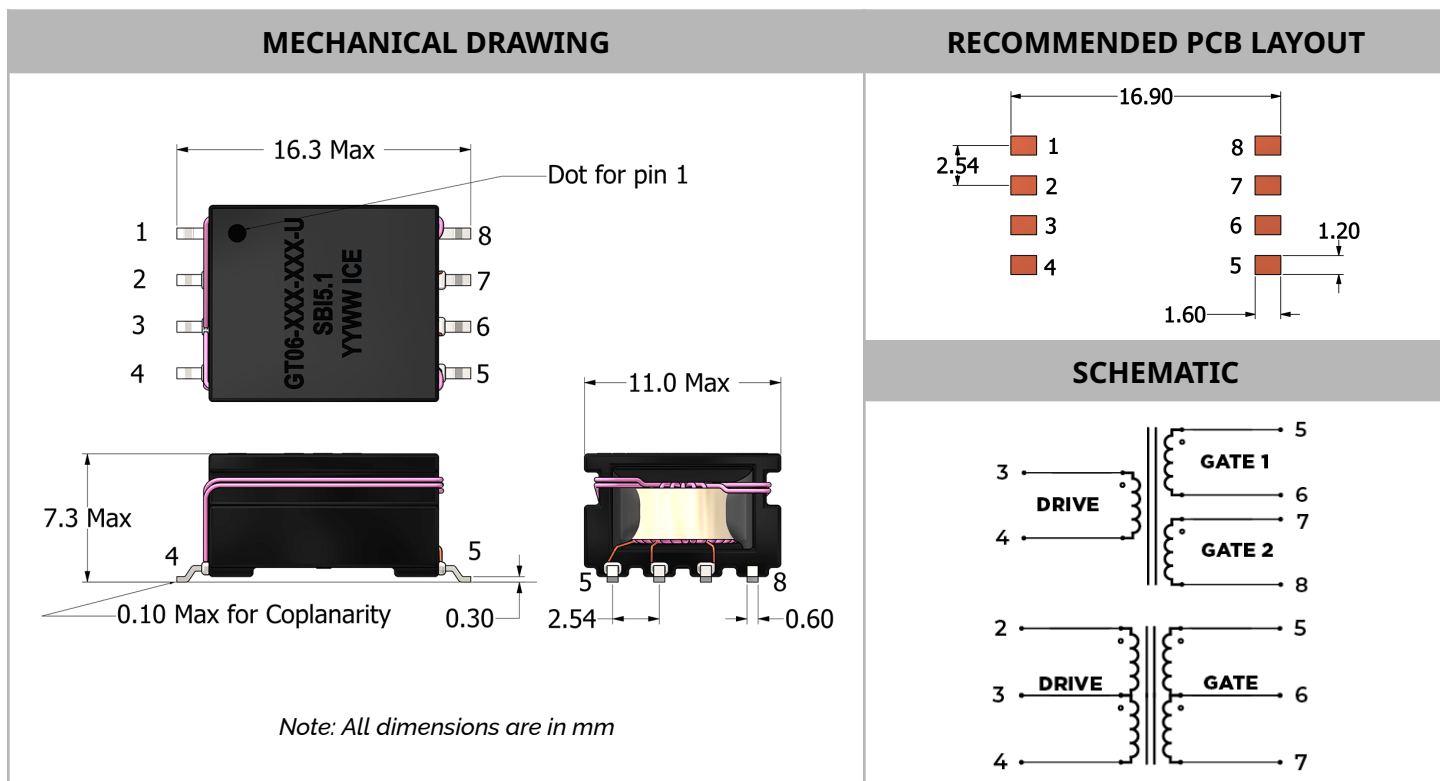

COMPLIANCE			
Creepage Distance	12.5 mm	Insulation System	SBI5.1(Class F) *
Clearance Distance	12.5 mm	Environmental & Safety	REACH, RoHS
Material Group	CTI IIIa (175V ≤ CTI < 400V)	Flammability Rating	UL-94 V-0
Standard		Condition	
Designed to comply with **	IEC 61558-1	For a working voltage up to 1000 V_{RMS} for Basic Insulation and 625 V_{RMS} for Reinforced Insulation ; with Creepage & Clearance of 12.5 mm, Overvoltage Category II, Pollution Degree 2, and Material Group IIIa.	
	IEC 62368-1	For a working voltage up to 1250 V_{RMS} (2.88 kV_{PEAK}) for Basic Insulation and 625 V_{RMS} (1.69 kV_{PEAK}) for Reinforced Insulation ; with Creepage & Clearance of 12.5 mm, Overvoltage Category II, Pollution Degree 2, and Material Group IIIa.	

NOTE:

* Applicable only to GT06-U models.

** GT06 models do not comply with IEC 61558-1 or IEC 62368-1. Compliance with these standards applies only to GT06-U models. Operations above 750 V_{PEAK} may require partial discharge testing. [Contact ICE](#) for more information.

Specifications subject to change without prior notice.

GT06 Series

High-Isolation SMT Gate Drive Transformers



RELIABILITY TESTING

[AEC-Q200 Qualification](#) and [ICE Reliability Testing](#) *


High Temperature Exposure (Storage), Temperature Cycling, High Temp Operational Life, Humidity Bias, Mechanical Shock, Vibration, Resistance to Solvents, Resistance to Soldering Heat, Electrostatic Discharge, Terminal Strength, Board Flex and Solderability

Passed All Tests

NOTE:

* GT06 models were qualified to the AEC-Q200 standard, while GT06-U models were tested using ICE Reliability standard.

REFLOW SOLDERING PROFILE (Lead-Free)

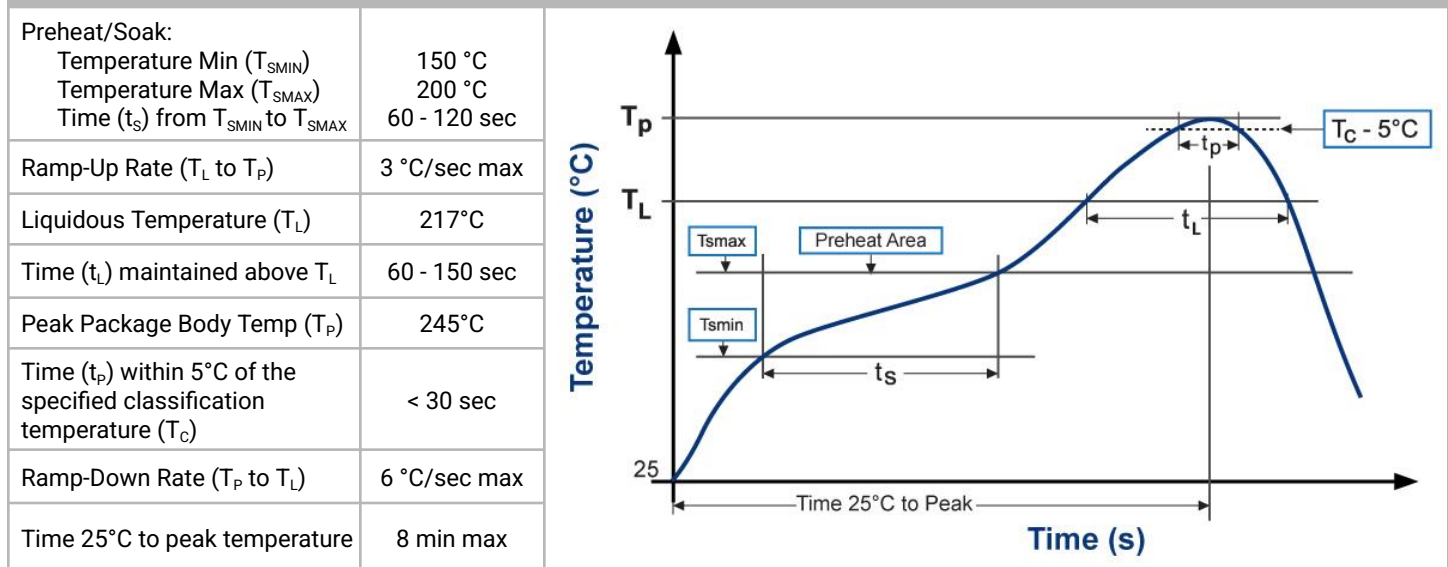

PACKAGING

Reel Diameter	13 inches
Reel Width	32 mm
Pieces/Reel	400
Reel/Box	8
Pieces/Box	3200

COMPONENT LIBRARY

AutoCAD 3D Model	SPICE Parameters
LTSpice	PSPice
Altium	Cadence
EagleCAD	

PCB Washing

See [ICE Washability Information](#).

Application Note

See [Applying Gate Drive Transformers in Push-Pull Topology](#)

Series Page

See <https://www.icecomponents.com/product/gt06-series/>

For questions or additional information, [contact ICE Components](#).

Specifications subject to change without prior notice.