

# GR-REC4-GFCI

## GFCI-Protected Quad-Receptacle Convenience Outlet



Panel or DIN Rail mounted AC outlets for powering laptop computers and test equipment.




### SPECIFICATIONS

|                                    |                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| Voltage Rating                     | 125V                                                                                            |
| Current Rating/Duplex              | 15A                                                                                             |
| Total Current Rating <sup>1</sup>  | 15A                                                                                             |
| Outlet Type                        | 1X Standard Duplex Receptacle <sup>2</sup> ,<br>1X GFCI Duplex Receptacle;<br>Black, NEMA 5-15R |
| Mounting                           | Panel or 35mm DIN Rail                                                                          |
| Wire Size Capacity                 | 14 - 12 AWG                                                                                     |
| Wire Strip Length                  | 0.20 - 0.31 in (5 - 8 mm)                                                                       |
| Wire Type                          | Copper or Copper Clad                                                                           |
| Tightening Torque                  | 4.5 lb-in (0.51 N.m)                                                                            |
| UL Temperature Rating <sup>3</sup> | 32 - 104 °F (0 - 40 °C)                                                                         |
| Operating Temperature <sup>4</sup> | 32 - 140 °F (0 - 60 °C)                                                                         |
| Circuit Protection                 | GFCI                                                                                            |
| RoHS Compliant                     | No                                                                                              |
| UL Standard                        | UL508                                                                                           |

### MECHANICAL DRAWING

Dimension: GR-REC4-GFCI (in mm, 1mm = 0.0394 inch)

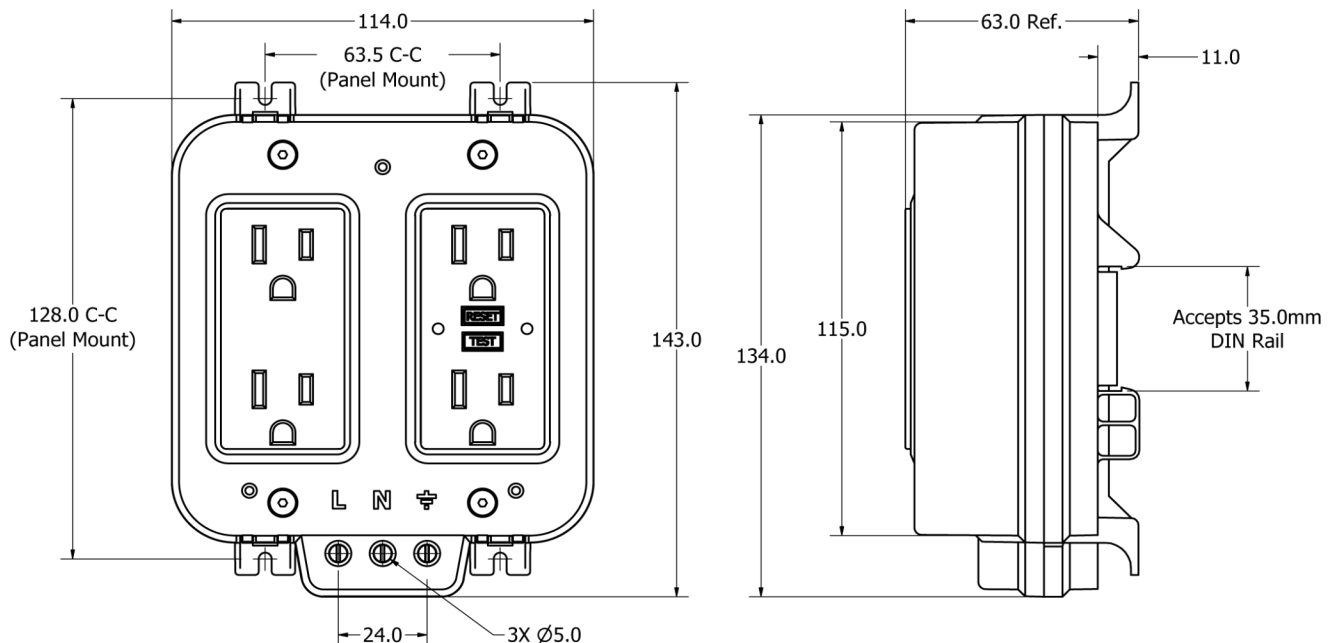

### NOTES:

1. Combined current capacity of all outlets.
2. GFCI-Protected (connected to the load side of GFCI outlet).
3. Maximum ambient temperature rating per UL508.
4. Maximum ambient temperature plus temperature rise of outlet wiring under load.